

ELIPTIČNI ZASUN EV PN 10/16 DN 50 – 300 ZA AZBESTCEMENTNE CIJEVI

EV-ABSPERRSCHIEBER PN 10/16 DN 50 – 300 FÜR AZ ROHRE

GATE VALVES EV PN 10/16 DN 50 – 300 FOR AC PIPES



NAZIVNI PROMJER NENNWEITE NOMINAL SIZE DN	NAZIVNI TLAK NENNDRUCK PRESSURE RATING PN bar		VODNI ISPITNI TLAK WASSERPRÜFDRUCK TEST PRESSURE bar				DOZVOLJENI RADNI TLAK KOD TEMPERATURE 70 °C ZULÄSSIGER DRUCK BEI TEMPERATUR 70 °C ADMISSIBLE PRESSURE AT TEMPERATURE 70 °C bar	
			KUČIŠTE GEHAUSE BODY		ZATVORENO IM ABSCHLUSS CLOSED			
50 – 300	10	16	16	25	10	16	10	16


**Broj artikla
Artikelnummer
Model N°
V2 – 07/AZ**

NAMJENA: VODA, PITKA VODA, PLIN, NAFTA, ZRAK DO 4 bara
VERWENDUNG: WASSER, TRINKWASSER, GAS, ÖL, LUFT BIS 4 bar
APPLICATION: WATER, DRINKING-WATER, GAS, OIL, AIR TO 4 bar

RADNA TEMPERATURA 70 °C
BETRIEBSTEMPERATUR BIS 70 °C
OPERATING TEMPERATURE 70 °C

Dozvoljena temperatura kod kratkotrajnog opterećenja 110 °C
Zulässige Temperatur bei Kurzzeitbelastung 110 °C
Admissible short-time temperature 110 °C

ISPITIVANJE IZVRŠENO PREMA EN 12266 (DIN 3230)
FERTIGUNGSKONTROLLE NACH EN 12266 (DIN 3230)
TEST ACCORDING TO EN 12266 (DIN 3230)

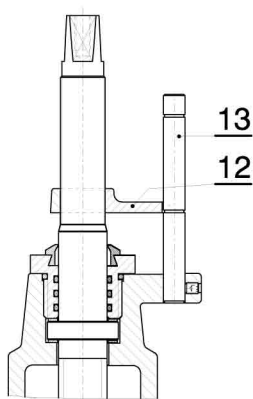

**POKAZIVAČ OTVORENOSTI
ANZEIGEWERK
POSITION INDICATOR**

POZ TEIL PART	MATERIJAL PO EN-u WERKSTOFF NACH EN MATERIAL ACC TO EN	MATERIJAL PO DIN-u WERKSTOFF NACH DIN MATERIAL ACC TO DIN
1	EN-GJS-500-7	GGG 50
2	EN-GJS-500-7	GGG 50
3	EPDM	EPDM
4	CC484K	Cu Sn 12Ni
	EN-GJS-500-7	GGG 50
5	EPDM	EPDM
6	EN-GJS-500-7	GGG 50
7	X20Cr13	X20Cr13
8	CC 480 K	CuSn 10
9	CC 480 K	CuSn 10
10	EPDM	EPDM
11	EPDM	EPDM
12	CC750S	CuZn33Pb
13	X5CrNi 18 10	X5CrNi 18 10
14	EN-GJL-250	GG 25

Ostali materijali na upit.
Andere Werkstoffe auf Anfrage.
Other materials on request.

